

Dimmable Flicker-Free LED Light Stick

The **L11-5L-1S10** is a complete LED lighting solution intended for display cases/windows, work stations, store lighting, bar lighting, under/above cabinets, closets, garages, shelves, ceilings, columns or anywhere that needs an extra burst of light. This powerful, low-profile LED light stick will enhance poorly lit regions of your home or business. Outputting 500 lumens of light guarantees this light stick will get the job done. The simple peel and stick installation process allows you to install the light stick on any flat surface, or use the included mounting brackets. Important features such as the LED's current limiting, thermal turn-down, and voltage shutdown protection circuitry are integrated into this system guaranteeing safety and long-lasting LEDs. Powered by our own LED Driver IC, the LS9100X - designed to be driven directly off the 120VAC line-voltage. The **L11-5L-1S10** is also TRIAC dimmable and linkable up to 25 units!





Key Features & Benefits

- 500 Lumens per Strip
- 30,000+ Hours
- Linkable Up to 25 units
- Power cord with TRIAC dimmer option
- Flicker-Free
- Simple Peel and Stick installation
- Voltage Shutdown Circuitry
- Thermal Turndown Circuitry
- Current Limiting Circuitry
- No Power Supply!
- Energy Saving

Customize to meet your specifications!

Dimensions and Accessories

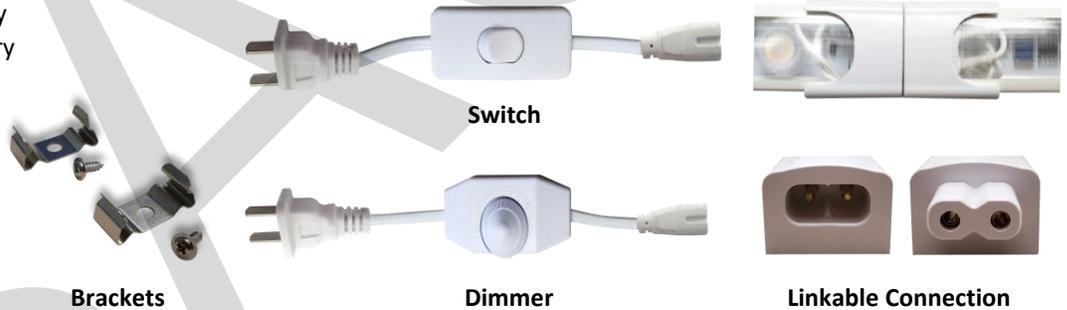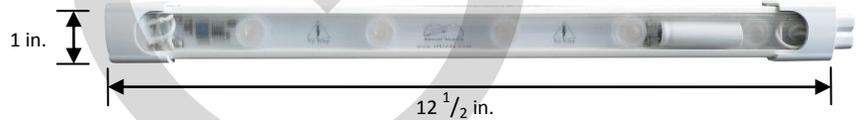

Technical Specifications

Power	Input Voltage	Current	Length	Width	Height
4.8 Watts	120 VAC	40 mA	12 1/2 in.	1 in.	3/4 in.
Dimming	CCT	Light Output	CRI	Ratings	
TRIAC Leading/Trailing Edge	3000K or 4000K	500 Lumens	80+ CRI	Indoor ONLY - Outdoor Coming Soon	
LEDs	Hours	Max Links	Installation		
5	30,000+	25 units	Peel & Stick and/or Mounting Brackets		

Published by

LSI Computer Systems, Inc. © 2019 All Rights Reserved.

Legal Disclaimer

The information included herein is believed to be accurate and reliable. However, LSI Computer Systems, Inc. assumes no responsibilities for inaccuracies, nor for any infringements of patent rights of others which may result from its use. LSI/CSI reserves the right to change circuitry and specifications at any time without notification to the customer. LSI/CSI assumes no liability for applications assistance or the design of Buyer's products. Buyers are the only responsible for their products and applications using LSI/CSI components. To minimize the risks associated with Buyers' products, Buyers should provide adequate design and operating safeguards.

Warranty

LSI Computer Systems, Inc. (LSI/CSI) warrants that this product will be free from defect in material and workmanship for a period of three (3) years from date of purchase and agrees to replace the defective product. Product must be purchase from LSI/CSI or an authorized distributor of LSI/CSI. The limited warranty is contingent upon normal, intended, and proper use, installation, transportation, and storage of the product in reasonable conditions without alteration or modification. Defective products under warranty should be returned with the original proof of purchase and prepaid postage to: LSI Computer Systems, Inc., 1235 Walt Whitman Road, Melville, New York 11747. THIS LIMITED WARRANTY IS IN LIEU OF ANY OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY OR OTHER SIMILAR STANDARD. TO THE EXTENT ALLOWED BY LAW, LSI/CSI IS NOT RESPONSIBLE FOR ANY INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES ASSOCIATED WITH A WARRANTY CLAIM. For complete terms and conditions of LSI/CSI, please visit www.lscsi.com